


Guide Gib series FLW

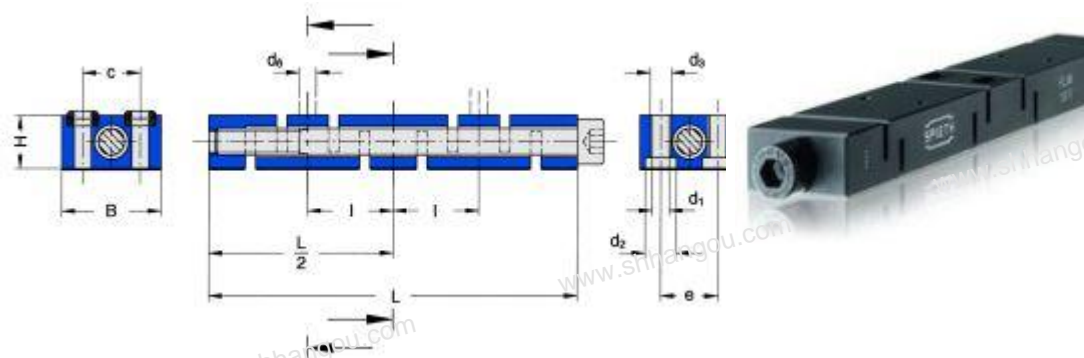

Designation of a guide gib **with** a wolfram-carbid coating with H = 10mm, B = 18mm, L = 66mm:

Guide gib FLW 10

Subject to changes.

Special versions:

On request, by sending of an explanatory sketch.

>>Delivery includes the pictured seal rings.<<

CAD	Code	Dimensions [mm]								clamping screws	Admissible load (guideline values)	Lubricant supply [mm]		
	FLW	H	B	L	d1	d2	d3	e	k	ISO 4762	N [N]	d6	l +/- 0,1	c +/- 0,1
🔍	6*	6	12	41	2,5	4,8	M3	6,5	1,7	M3x40	900	0,0	0,0	0
🔍	8*	8	14	56	2,5	4,8	M3	8,0	1,7	M4x55	1900	0,0	0,0	0
🔍	10	10	18	66	3,3	5,9	M4	10,0	2,2	M5x65	2800	2,5	15,0	10
🔍	12	12	20	76	3,3	5,9	M4	11,0	2,2	M6x75	3600	2,5	17,5	11
🔍	12/1	12	20	110	3,3	5,9	M4	11,0	2,2	M6x110	7000	2,5	26,5	11
🔍	15	15	25	100	4,3	7,4	M5	15,0	3,0	M8x100	6000	2,5	22,2	15
🔍	15/1	15	30	150	6,8	10,4	M8	18,0	4,5	M8x150	18000	2,5	34,0	18
🔍	20	20	35	200	6,8	10,4	M8	22,0	4,5	M12x200	28000	3,0	44,0	22
🔍	26	26	45	250	8,4	13,5	M10	28,0	6,0	M16x250	45000	3,0	54,0	28

* FLW 6 and FLW 8 without lubrication holes.